



10FYL-13A

SIZE	d	L	FLANGED								H	◇	◇	d0	l	Q'TY
			D	C	g	f	t	N	h							
15	1/2	15	125	95	70	51	1	12	4	15	55	73	89	18	40	
20	3/4	20	140	100	75	56	1	14	4	15	70	93	110	23	52	
25	1	25	160	125	90	67	1	14	4	19	80	104	126	30	56	
32	1 1/4	32	180	135	100	76	2	16	4	19	93	125	150	37	68	
40	1 1/2	40	190	140	105	81	2	16	4	19	100	132	159	43	71	
50	2	50	220	155	120	96	2	16	4	19	115	153	183	53	82	

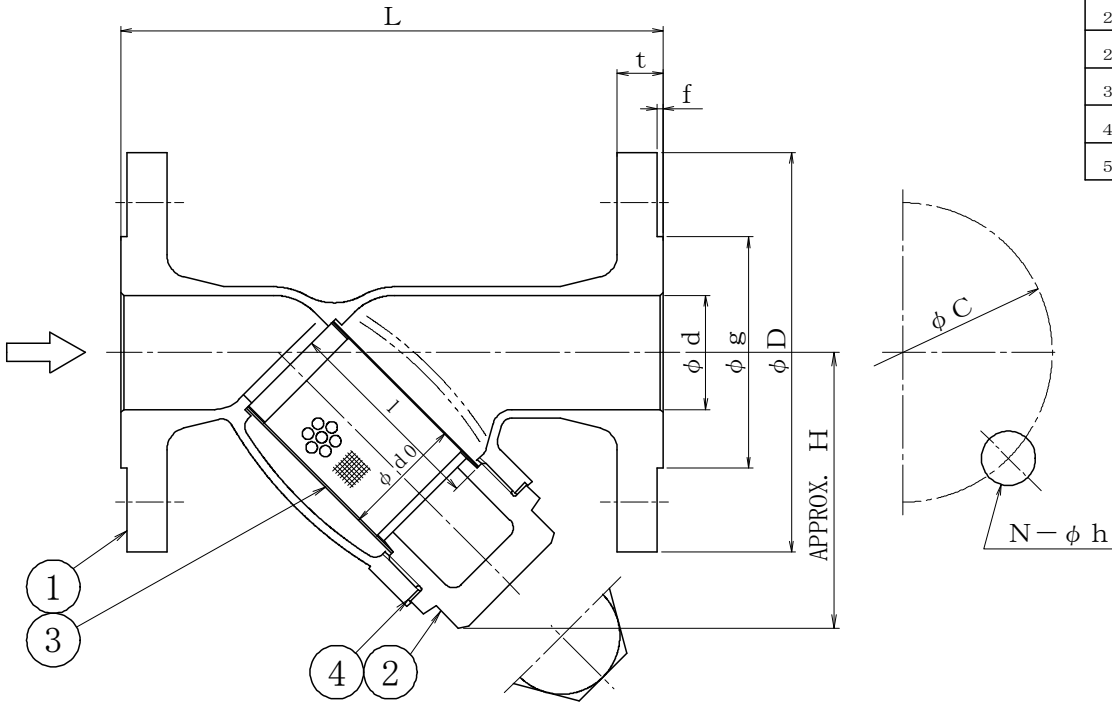

SCREEN

	MESH
	20 MESH
	40 MESH
	60 MESH
	80 MESH
	100 MESH

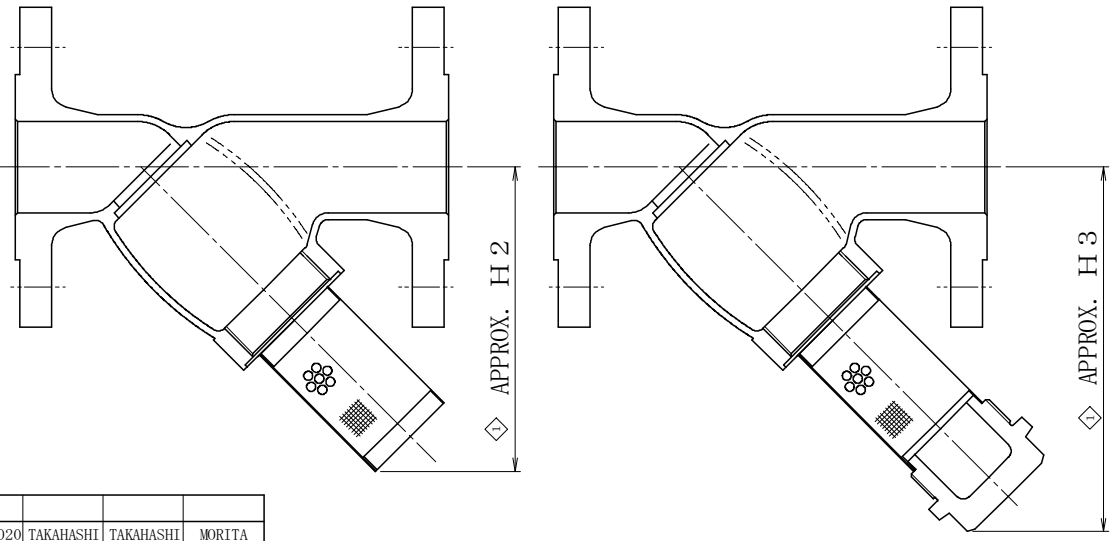

4	GASKET	T#9007-G20	1	
3	SCREEN	SUS304	1	
2	CAP	SCS13A	1	
1	BODY	SCS13A	1	
No	NAME OF PART	MATERIAL	Q.T.Y	REMARKS

NAME 10K
FLANGED Y TYPE STRAINER

FLUID		TEST PRESSURE	BODY	(HYD)	1.5 MPaG
				(AIR)	MPaG
DESIGN PRESSURE	1.0 MPaG		SEAT	(HYD)	MPaG
				(AIR)	MPaG
DESIGN TEMPERATURE	150 °C			(HYD)	MPaG
				(AIR)	MPaG

DRAWING No			MODEL No 10FYL-13A	
DATE	A. P	C. K	D. S	D. W
AUG. 7. 2019	TAKAHASHI	TAKAHASHI	MORITA	MORITA

No	DESCRIPTION	DATE	A. P	C. K	D. W
◇	Changed the specification	APR. 22, 2020	TAKAHASHI	TAKAHASHI	MORITA

REVISIONS