


SIZE	d	L	FLANGED								H	H2	d _o	l	W	Q' TY
			D	C	g	f	t	N	h							
65	2 1/2	65	270	175	140	116	2	18	4	19	160	205	68	108	R3/8	
80	3	80	290	185	150	126	2	18	8	19	200	262	85	140	R3/8	
100	4	100	350	210	175	151	2	18	8	19	240	331	104	178	R1/2	
125	5	125	390	250	210	182	2	20	8	23	275	379	130	200	R1/2	
150	6	150	440	280	240	212	2	22	8	23	320	445	155	230	R3/4	
200	8	200	540	330	290	262	2	22	12	23	410	569	205	295	R3/4	

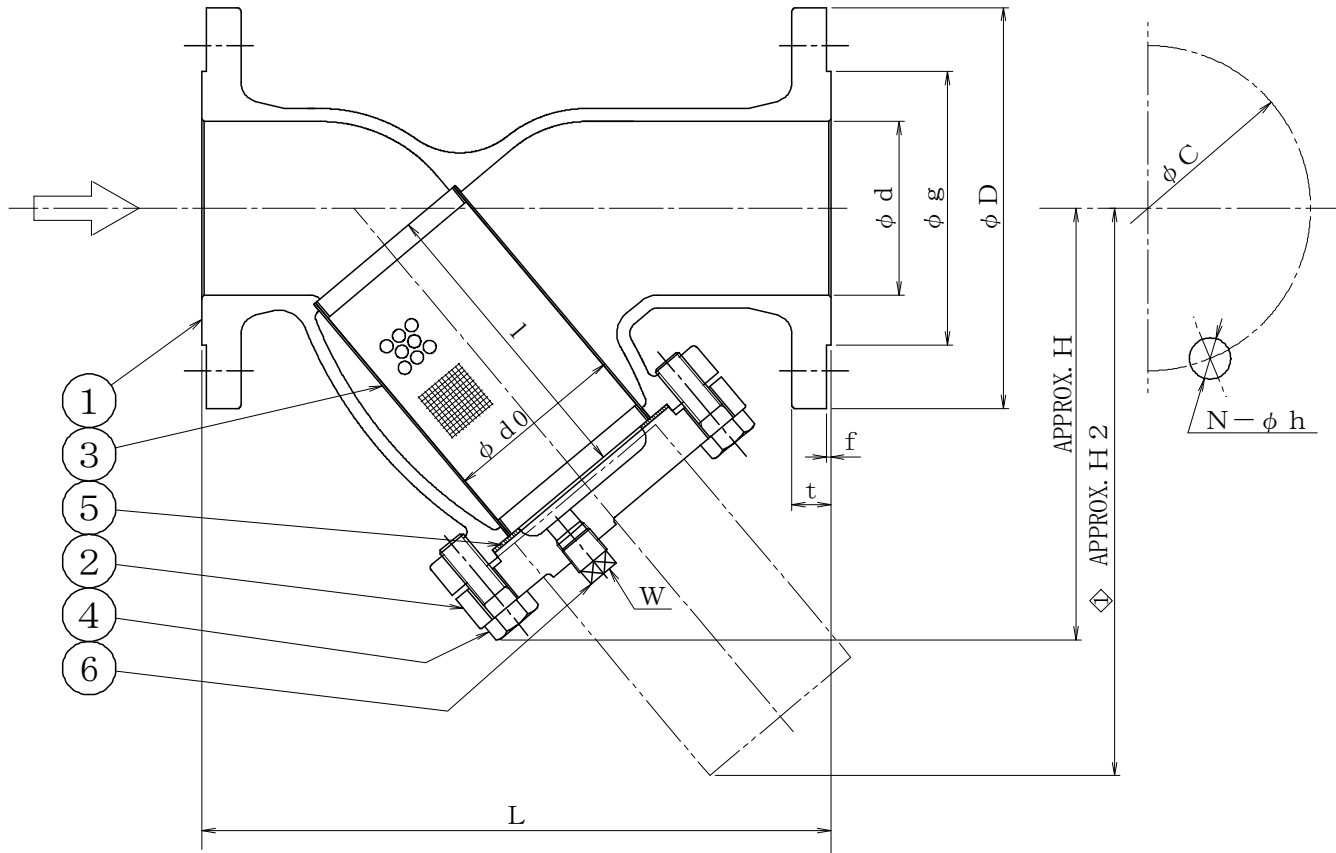

SCREEN

	MESH
	20 MESH
	40 MESH
	60 MESH
	80 MESH
	100 MESH

6	DRAIN PLUG	SUS316	1	
5	GASKET	T#9007-G20	1	
4	BOLT	SUS304	SET	
3	SCREEN	SUS316	1	
2	COVER	SCS14A	1	
1	BODY	SCS14A	1	
No	NAME OF PART	MATERIAL	Q.T.Y	REMARKS

NAME 10K
FLANGED Y TYPE STRAINER

FLUID		TEST PRESSURE	BODY	(HYD) 1.5 MPaG (AIR) MPaG
DESIGN PRESSURE	1.0 MPaG		SEAT	(HYD) MPaG (AIR) MPaG
DESIGN TEMPERATURE	150 °C			(HYD) MPaG (AIR) MPaG

DRAWING No _____ MODEL No 10FYL-14A

DATE	A. P	C. K	D. S	D. W
JUL. 27, 2017	MORITA	MORITA	MORITA	HISAKA



THREE-M INDUSTRY CO., LTD.

No	DESCRIPTION	DATE	A. P	C. K	D. W
◇	Changed the specification	APR. 24, 2020	TAKAHASHI	TAKAHASHI	MORITA

REVISIONS