


SIZE	d	L	FLANGED								H	H2	d0	l	W	Q' TY
			D	C	g	f	t	N	h							
2 1/2	65	65	269	178	139.7	104.6	1.6	17.6	4	19	150	205	68	108	R3/8	
3	80	80	293	190	152.4	127.0	1.6	19.1	4	19	210	262	85	140	R3/8	
4	100	100	362	229	190.5	157.2	1.6	23.9	8	19	235	331	104	178	R1/2	
5	125	125	398	254	215.9	185.7	1.6	23.9	8	22	290	379	130	200	R1/2	
6	150	150	447	279	241.3	215.9	1.6	25.4	8	22	340	445	155	230	R3/4	
8	200	200	554	343	298.4	269.7	1.6	28.5	8	22	410	569	205	295	R3/4	

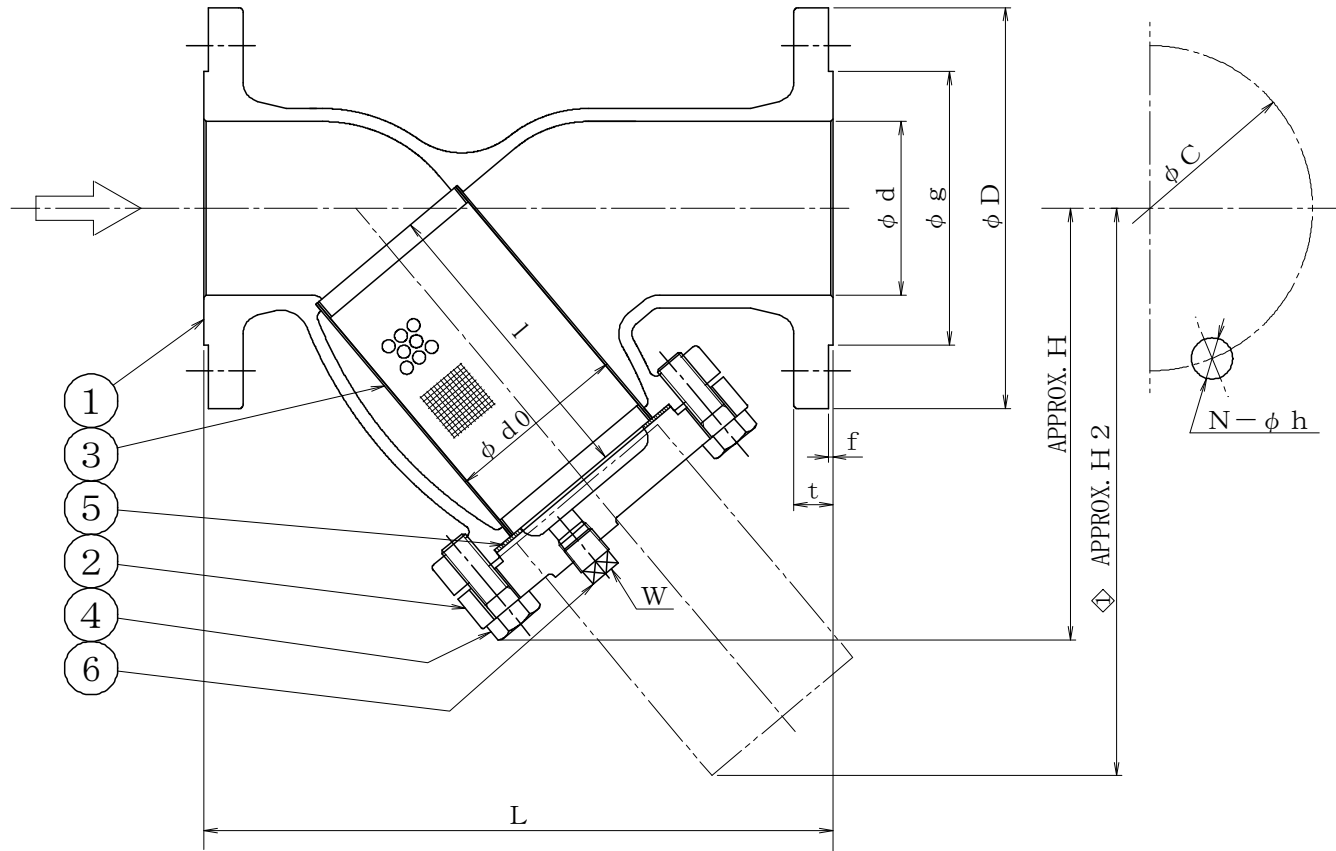

SCREEN

	MESH
	20 MESH
	40 MESH
	60 MESH
	80 MESH
	100 MESH

No	NAME OF PART	MATERIAL	Q.T.Y	REMARKS
6	DRAIN PLUG	SUS304	1	
5	GASKET	T#9007-G20	1	
4	BOLT	SUS304	SET	
3	SCREEN	SUS304	1	
2	COVER	SCS13A	1	
1	BODY	SCS13A	1	

NAME CLASS 150  
FLANGED Y TYPE STRAINER

FLUID	DESIGN PRESSURE	DESIGN TEMPERATURE	TEST PRESSURE	BODY	SEAT
	1.0 MPaG	150 °C		(HYD) 1.5 MPaG (AIR) MPaG	(HYD) MPaG (AIR) MPaG
				(HYD) MPaG (AIR) MPaG	(HYD) MPaG (AIR) MPaG

DRAWING No	MODEL No	150FYL-13A		
DATE	A. P	C. K	D. S	D. W
JUL. 11, 2016	MORITA	MORITA	MORITA	MORITA

No	DESCRIPTION	DATE	A. P	C. K	D. W
◇	Changed the specification	JUN. 1, 2020	TAKAHASHI	TAKAHASHI	MORITA

REVISIONS